

## i32 Indoor key kiosk



### 24/7 Self service

A fully automatic, stand-alone, self-service kiosk for key exchange, operated via display, SMS, and WEB link



### Easy installation

Floor mounted, indoor placement




### Leading in Automotive

Designed, and built for car rentals, dealerships and workshops



### High quality

Scandinavian design, steel frame and lockers, built for long-lasting operation

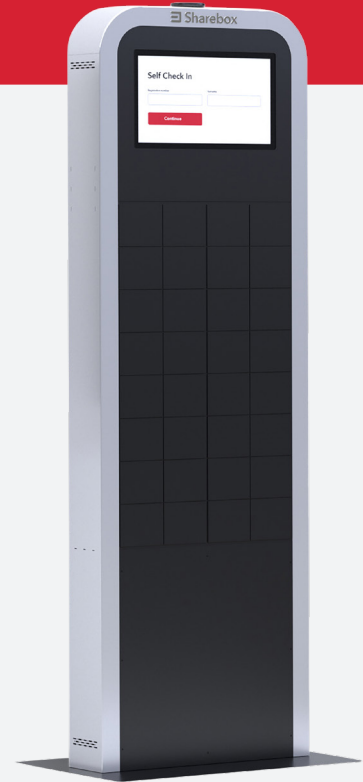

### Installation info

- Place kiosk on integrated metal base
- Connect power- and internet cables
- Mobile router can replace cabled Internet

### Certifications

- RoHS Directive 2011/65/EU
- Low Voltage Directive 2014/35/EU
- Health & Safety EN 60950-:2006/A 11 :2009 /A 1:2010/
- A 12:2011 /A2:2013
- EN 62311 :2008 magnetic fields (0Hz - 300 GHz)
- EMC (Art. 3(1 )(b))
- EN 55032:2012; EN55024:2010
- SPECTRUM (Art. 3(2)): EN 300 328 v2.1.1

### Technical specification

- Frame and lockers in stainless steel
- Dimensions:  
(HxWxD): 175x65x50 cm 168.9 x 25.6 x 2"
- Weight:  
i16: 90kg 198.4lb  
i32: 105kg 231.5lb
- Connectivity: Cabled Ethernet and L TE-M (2GI3GI4G) Ethernet-, Wi-Fi-, LTE Router (optional)
- Colour: Black or White
- Operation: Indoor
- Operational Temp: 0° C .. +50°C
- No. of lockers: 16 or 32
- Locker size (HxWxD): 6 x 9 x 7 cm 1 2 x 3.5 x 2.8"
- Power supply: 100-240VAC
- Power Consumption: approx. 10 W

### Security and maintenance

- The kiosk is designed for indoor use only, standing on integrated metal base
- For service purposes, the back plate can be removed
- All kiosks are remotely monitored and diagnosed by Sharebox. In case of malfunctioning or break-in situations, the operations center will be notified
- Software updates are done remotely. Kiosks within maintenance agreement will receive yearly preventive maintenance
- Daily operations (removal of dust, stuck objects etc.) should be performed by the local site operator/ customer