



w64 high-capacity kiosk



24/7 Self service

A fully automatic, stand-alone, self-service kiosk for key exchange, operated via display, SMS, WEB link, QR code or RFID



Easy installation

Floor standing, mounted to wall or on a base plate



Leading in Automotive

Designed, and built for car rentals, dealerships and workshops




High quality

Scandinavian design, steel frame and lockers, built for long-lasting operation

Installation info

- Place upright and mount to rear wall or on a base plate
- Connect power- and internet cables
- Mobile router can replace cabled Internet

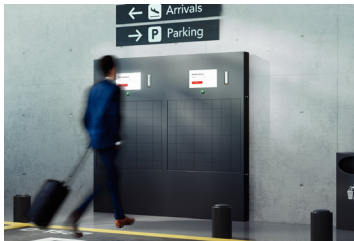

Certifications

- RoHS Directive 2011/65/EU
- Low Voltage Directive 2014/35/EU
- Health & Safety EN 60950-:2006/A11:2009 /A1:2010/
- A12:2011 /A2:2013
- EN 62311:2008 magnetic fields (0Hz – 300 GHz)
- EMC (Art. 3(1)(b))
- EN 55032:2012; EN55024:2010
- SPECTRUM (Art. 3(2)): EN 300 328 v2.1.1

Technical specification

- Frame and lockers in stainless steel
- Dimensions:
(HxWxD): 174x100x15 cm | 68.5 x 39.4 x 5.9"
- Weight:
130kg | 353 lb
- Colour: Black
- Operation: Indoor
- Operational Temp: 0°C .. +50°C
- No. of lockers: 64
- Locker size (HxWxD): 6 x 9 x 7 cm | 2 x 3.5 x 2.8"
- Touch screen size: 15"
- Power supply: 100-240VAC
- Power consumption: approx. 10 W

Security and maintenance

- The kiosk is designed to be floor standing, mounted to rear wall or on a base plate
- For secure mounting, high quality screws, wall anchors etc. should be used. The fasteners should match the properties of the wall
- For service purposes, the front- and back plate can be removed
- All kiosks are remotely monitored and diagnosed by Sharebox. In case of malfunctioning or break-in situations, the operations centre will be notified
- Software updates are done remotely. Kiosks within maintenance agreement will receive yearly preventive maintenance
- Daily operations (removal of dust, stuck objects etc.) should be performed by the local site operator/customer